



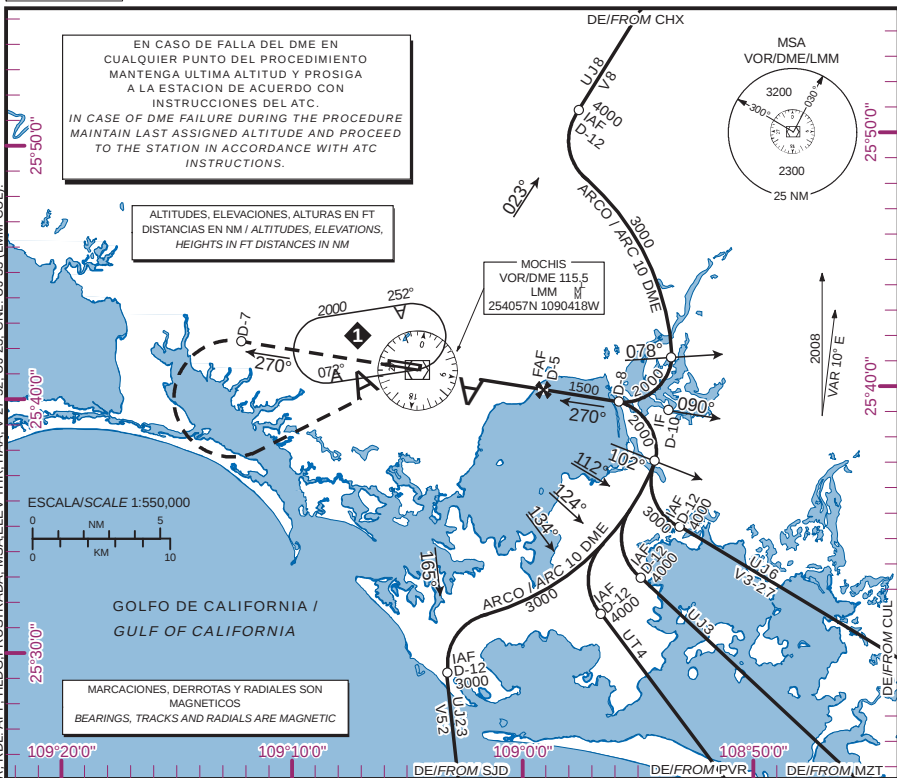

### APROXIMACION FRUSTRADA / MISSED APPROACH

ASCIENDA EN RADIAL 270° HASTA D-7, EFECTUE VIRAJE DE GOTAA LA IZQUIERDA DENTRO DE 10 NM HACIA EL VOR/DME/LMM HASTA LA ALTITUD MINIMA DE ESPERA.  
CLIMB VIA LMM VOR R-270° TO D-7, THEN TURN LEFT WITHIN 10 NM TO VOR/DME/LMM AT THE MINIMUM HOLDING ALTITUDE.

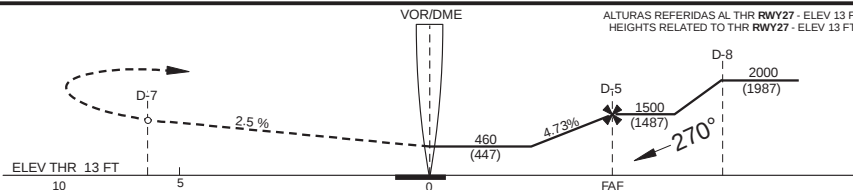

| CAT                | A                     | B                         | C                     | D              |
|--------------------|-----------------------|---------------------------|-----------------------|----------------|
| DIRECT MDA (MDH)   | 460 (447)             | 1 (1600 M)                | 1 1/4 (2000 M)        | 1 1/2 (2400 M) |
| CIRCLING MDA (MDH) | 560 (544) -1 (1600 M) | 560 (544) -1 1/2 (2400 M) | 580 (564) -2 (3200 M) |                |

### GRADIENTE DE DESCENSO / RATE OF DESCENT

| FAF-MAPT<br>5 NM<br>4.73% | VEL GS (KTS) | 80   | 100  | 120  | 140  | 160  | 180  | 200  |
|---------------------------|--------------|------|------|------|------|------|------|------|
|                           | FT/MIN       | 383  | 479  | 575  | 671  | 766  | 862  | 958  |
|                           | MIN:SEC      | 3:45 | 3:00 | 2:30 | 2:08 | 1:52 | 1:40 | 1:30 |

ALTITUD MINIMA SEGUN  
DISTANCIA DME/LMM /  
MINIMUM ALTITUDE ACCORDING  
TO DISTANCE DME/LMM

| NM | 4    | 3   | 2   |
|----|------|-----|-----|
| FT | 1210 | 920 | 630 |